

TECHNICAL PRODUCT DATASHEET









UPDATED: 12/09/2022

Hantex H2N+

3/4 Dual Coated Nitrile Thermal Glove

The Hantex H2N+ consists of a double knitted liner and a dual nitrile foam 3/4 coating. The red polyester outer is enhanced by a premium brushed acrylic inner for excellent thermal insulating properties without compromising on the fit and comfort of the glove. The 3/4 flat nitrile first coating provides a water proofing layer to keep the hands dry whilst still be able to offer a degree of breathability to the lower hand. The second sandy nitrile palm coating provides the grip by using micro-capillaries to draw liquid and oils away from the surface of the glove and ensuring a stable hold of slippery

Tested for contact heat of up to 250deg for up to 15 seconds as part of EN407:2020. Each pair is retail headercard.



FEATURES AND TECHNOLOGY







HEAT TESTED



COLD CONDITIONS



RETAIL PACKAGED



NITRILE FOAM

TYPICAL INDUSTRIES



GENERAL PURPOSE



MAINTENANCE



RETAIL






BUILDING & CONSTRUCTION

TECHNICAL INFORMATION

ORDER REF #	G/HANTEX-H2N
COATING MATERIAL	Double Coated Nitrile
PACKING	PER PACK: 10 x Pair
	PER CASE: 100 x Pair
SIZES AVAILABLE	8 (M), 9 (L), 10 (XL), 11 (2XL)
EU TYPE CERTIFICATION BY	CCQS Certification Services Limited Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin15, D15 AKK1, Ireland (Notified Body No. 2834)
UKCA TYPE CERTIFICATION BY	CCQS UK Limited 5 Harbour Exchange Square London, E14 9GE, United Kingdom (Notified Body No. 1105)

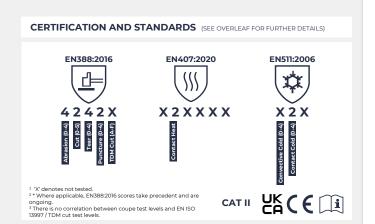





🕕 **Fax:** +44 (0)1902 451 271



Web: www.ultimateindustrial.co.uk





TECHNICAL PRODUCT DATASHEET







HEAT PROTECTION



UPDATED: 12/09/2022

CERTIFICATION LEGENDS





For dulling during cut resistance test (6.2), the coupe test results are only indicative while the TDM cut resistance test (6.3) is the reference performance result.





permissable use exposure, see seperate

D

С

В

FURTHER INFORMATION

STORAGE / TRANSPORT: Keep away from direct sunlight; store in a cool dry place. Keep away from ozone sources or naked flame. Store the gloves in their original packaging. During transportation, ensure the product is well packaged and protected in order to prevent any damage.

PRECAUTIONS BEFORE USE: 1. Never use these gloves with chemicals. 2. Gloves should not be used when there is a risk of entanglement with moving machine parts. 3. Before usage and periodically during usage, inspect the gloves for any defects or imperfections. Avoid wearing damaged, dirty or worn out gloves. 4. The gloves should not come in contact with a naked flame or fire. 5. Do not subject to high speed or serrated blades. 6. Always read enclosed user instructions before using these gloves. 8. The information provided is for products in a new condition and does not reflect the actual duration of protection in the workplace. 9. Service life cannot be specified and depends on the application and the responsibility of the user to ascertain suitability of the glove for its intended use


CONSTITUENTS / ALLERGIES: Some gloves may contain ingredients which are known to be a possible cause of allergies in sensitive persons who may develop irritant and/or allergic contact reactions. If an allergic reaction should occur seek medical advice immediately.

WARNING: This product contains natural rubber latex which may cause allergic reactions. If affected, discontinue use immediately and seek medical advice.

For more information about this product, or to access the Declaration of Conformity or Product Certification, visit; https://www.ultimateindustrial.co.uk/hand-and-arm/cold-protection/hantex-h2n

If appropriate to the product, EC/EU Declaration of Conformities, relevant certification and supporting documentation are available to access through your distributor, at the above web address(s) or by contacting UCi customer services quoting the product reference code. This document and any other statement provided herein by or on behalf of UCi are given for informational purposes and do not constitute a contractual agreement nor warranty of merchantability. UCi assumes no responsibility for the suitability or adequacy of an end user's selection of product for a specific purpose. The manufacturer reserves the right to make any modifications it deems necessary. All product and company names are trademarks[™] or registered[®] trademarks of their respective holders. [®] UCI Limited, 2020













Registered in England No. 2035621

¹ Testing carried out on the palm material. Except in cases where the glove is equal to or over 400mm - where the cuff is tested also tested. ² 'X' denotes Not Tested. ³ Where applicable, EN388:2016 scores take precedent and are ongoing. There is no correlation between coupe test levels and ISO 13997 / TDM cut test levels. Where both EN388:2016 and EN388:2003 scores are shown, the latter is shown for informational purposes only.