

TEGERA® 993

Cut resistant glove, Dyneema®, glass fibre thread, nylon, 13 gg, cut resistance level 4, cut resistance level B, Cat. II, grey, for allround work

PROPERTIES

Light

SPECIFICATION

TYPE OF GLOVE Cut resistant gloves

CATEGORY Cat. II

CUT RESISTANCE (COUP) Cut resistance level 4

CUT RESISTANCE (EN ISO 13997) Cut resistance level B

CUT RESISTANCE (EN ISO 13997) NEWTON VALUE 12,5

SIZE RANGE (EU) 7, 8, 9, 10, 11

LINER MATERIAL Dyneema®, glass fibre thread, nylon, 13 gg

DEXTERITY 5

CUFF STYLE Knitwrist cuff

LENGTH RANGE 230-270 mm

COLOUR Grey

PIECES PER PACKAGE/CARTON 24/240

PIECES PER BAG 1

DISPLAY Bulk pack

MATERIAL SPECIFICATION UHMWPE, nylon, glass fibre thread



SIZE	ART. NO.	EAN NO.
7	993-7	7392626021068
8	993-8	7392626021075
9	993-9	7392626021082
10	993-10	7392626021105
11	993-11	7392626021112

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

TEGERA® 993

FEATURES

Cut resistant according to EN 388:2003 level 4, cut resistant according to 388:2016 level B

PREVENTS RISK OF

Cut injuries, abrasion injuries, grazes, scratches, lacerations

PRIMARY ENVIRONMENTS OF USE

Cut risk environments

PRIMARY AREAS OF USE


Fine assembly, assembly, inspection work, sheet-metal work

PRIMARY INDUSTRIES OF USE


Metal fabrication, automotive

TYPE OF WORK

Medium weight

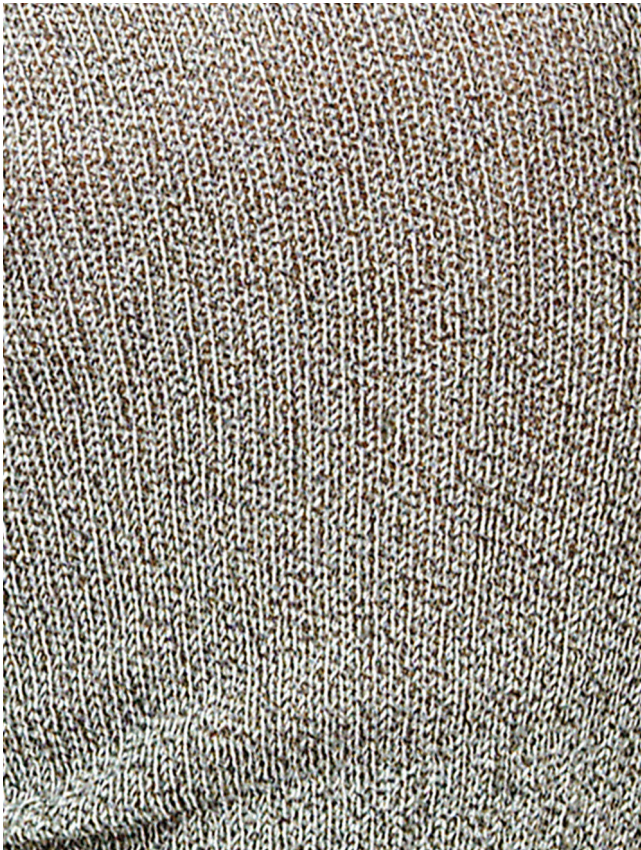

CE Cat. II



All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2020-03-19

2(3)

ejendals
PROTECTING HANDS AND FEET

EJENDALS AB

Box 7, SE-793 21 Leksand, Sweden

Phone +46 (0) 247 360 00

Fax +46 (0) 247 360 10

info@ejendals.com

order@ejendals.com

www.ejendals.com

TEGERA® 993

EC TYPE EXAMINATION

Notified Body: 0321 SATRA Technology Centre, Wyndham Way, Telford Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom

COMPLIANCE DESCRIPTION

EN 420:2003 Protective gloves - general requirements and test methods

EN 388:2003 Protective gloves against mechanical risks

Property	Level Achieved	(Maximum Performance)
A) Resistance to abrasion (No. of revolutions)	1	(4)
B) Resistance to cutting (Index)	4	(5)
C) Tear resistance (Newton)	4	(4)
D) Puncturing resistance (Newton)	2	(4)


EN 388 - Testing (specifies the requirements that apply for each safety level).

Level of protection/Performance level	1	2	3	4	5
A) Resistance to abrasion (No. of revolutions)	100	500	2000	8000	
B) Resistance to cutting (Index)	1,2	2,5	5,0	10,0	20,0
C) Tear resistance (Newton)	10	25	50	75	
D) Puncturing resistance (Newton)	20	60	100	150	

3(3)



CE Cat. II



All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2020-03-19

ejendals
PROTECTING HANDS AND FEET

EJENDALS AB

Box 7, SE-793 21 Leksand, Sweden

Phone +46 (0) 247 360 00

Fax +46 (0) 247 360 10

info@ejendals.com

order@ejendals.com

www.ejendals.com