TEGERA®

TEGERA® 414

Synthetic leather glove, unlined, 0,7 mm synthetic leather, polyester, Cat. II, grey, black, blue, chrome free, elasticated 360°, for allround work

PROPERTIES

Flexible, durable, good grip, good fit, comfortable, breathable

SPECIFICATION

TYPE OF GLOVE Work gloves - General handling

CATEGORY Cat. II

SIZE RANGE (EU) 8, 9, 10, 11

PALM MATERIAL Synthetic leather

PALM THICKNESS 0,7 mm

BACK MATERIAL Polyester

LINING Unlined

DEXTERITY 3

FASTENING Elasticated 360°

LENGTH RANGE 250-270 mm

COLOUR Grey, black, blue

PAIRS PER PACKAGE/CARTON 6/60

PIECES PER BOX 6

DISPLAY Hook with hangtag

MATERIAL SPECIFICATION Polyurethane, polyester

SIZE	ART. NO.	EAN NO.
10	414-10	7392626069855
11	414-11	7392626069879
8	414-8	7392626069893
9	414-9	7392626069916

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

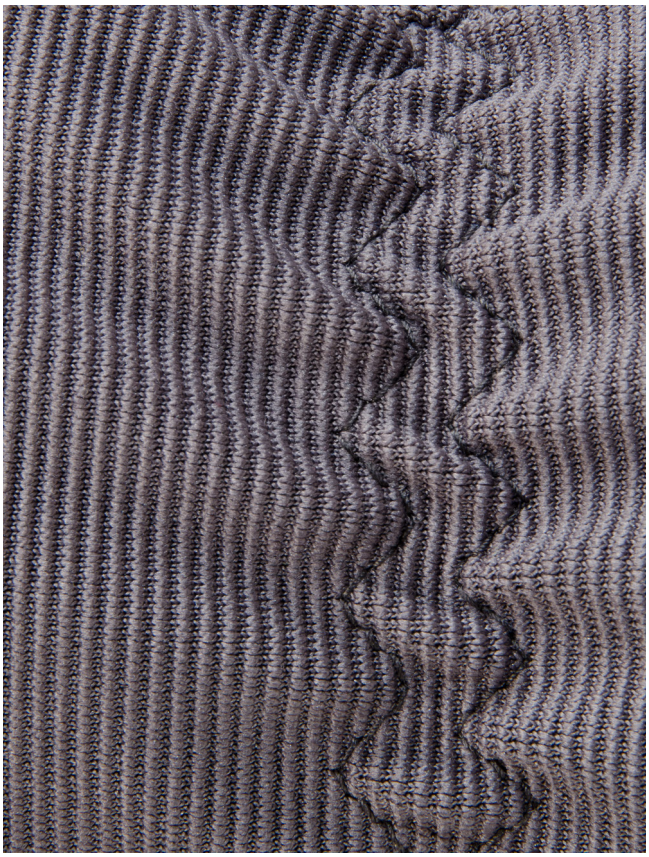

TEGERA® 414

FEATURES
Chrome free, breathable back, elastic

PREVENTS RISK OF
Chrome allergy, abrasion injuries, blisters, grazes, scratches, lacerations, contact with dirt, drying out, chapping

PRIMARY ENVIRONMENTS OF USE
Dry environments, dirty environments

PRIMARY AREAS OF USE
Assembly, machine operating, installation work, transport work, machine driving, warehouse work, airport work

PRIMARY INDUSTRIES OF USE
Agriculture, automotive, transportation, utilities, building and construction, logistics, HoReCa, facilities, service, retail

TYPE OF WORK
Medium weight

CE Cat. II

EN 420:2003 + A1:2009 EN 388:2016 1022X

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2020-06-14

ejendals
PROTECTING HANDS AND FEET

EJENDALS AB
Box 7, SE-793 21 Leksand, Sweden
Phone +46 (0) 247 360 00
Fax +46 (0) 247 360 10
info@ejendals.com
order@ejendals.com
www.ejendals.com

TEGERA®

TEGERA® 414

CE Cat. II

EN 420:2003 + A1:2009 EN 388:2016 1022X

EU-TYPE EXAMINATION

2777 Satra Technology Europe Ltd Bracetown Business Park, Clonee, Dublin 15, Dublin, Ireland

COMPLIANCE DESCRIPTION

EN 420:2003 + A1:2009 Protective gloves - general requirements and test methods

EU 2016/425

EN 388:2016 Protective gloves against mechanical risks

Property	Level Achieved	(Maximum Performance)
a) Resistance to abrasion (No. of revolutions)	1	(4)
b) Cut resistance (Index)	0	(5)
c) Tear resistance (N)	2	(4)
d) Puncturing resistance (N)	2	(4)
e) Cut resistance, EN ISO 13997 (N)	X	(F)
f) Impact protection, EN 13594:2015		(P)

EN 388 – Testing
(specifies the requirements that apply for each safety level).

Level of protection/Performance level	1	2	3	4	5
a) Resistance to abrasion (No. of revolutions)	100	500	2 000	8 000	
b) Cut resistance (Index)	1,2	2,5	5,0	10,0	20,0
c) Tear resistance (N)	10	25	50	75	
d) Puncturing resistance (N)	20	60	100	150	

Level of protection/Performance level	A	B	C	D	E	F
e) Cut resistance, EN ISO 13997 (N)	2	5	10	15	22	30

Level of protection/Performance level	P
f) Impact protection, EN 13594:2015	Pass (Level 1 ≤ 9 kN)

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

2020-06-14

ejendals
PROTECTING HANDS AND FEET

EJENDALS AB
Box 7, SE-793 21 Leksand, Sweden
Phone +46 (0) 247 360 00
Fax +46 (0) 247 360 10
info@ejendals.com
order@ejendals.com
www.ejendals.com