




Nitrile

Reliable performance and chemical splash protection

- Extra long 355 mm / 14 in cuff provides cross contamination and forearm protection
- Soft, durable nitrile material ensures broad chemical splash protection
- Double chlorinated for easy donning and double gloving
- Packaged in polybags

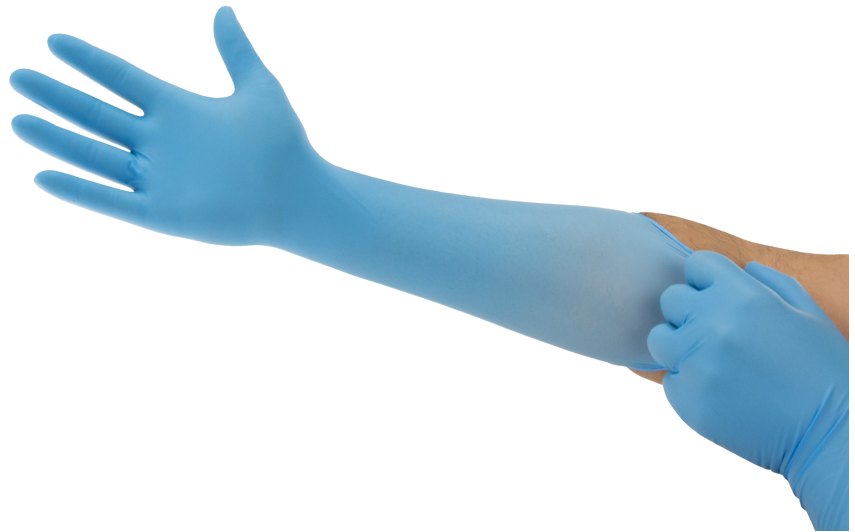

Industries

- Electronics
- Food Processing
- Industrial
- Janitorial / Sanitation
- Life Sciences
- Manufacturing
- Recycling and Waste Disposal

Recommended For

- Blending, compounding materials
- Food processing and handling
- Handling of tools
- Handling of paint/glue guns and sprayers
- Laboratory analysis
- Maintenance and equipment clean up
- Chemical Handling



TECHNICAL DATA SHEET

PRODUCT INFORMATION

	93-263
Material	Nitrile
Color	Blue
Glove Design	Double Chlorinated, Powder-Free, Silicone Free, Fully Textured
Cuff	Beaded
Manufacturing/QMS Audit Standards	ISO 9001:2008
Regulatory/Standards Compliance	ASTM D6319, ASTM D412, ASTM D6124, Category III, EC 1935/2004, EC 2023/2006, EN ISO 374-1:2016, EN 420:2003 + A1:2009, EN ISO 374-5:2016, EN 374:2003, EN 421:2010, FDA21 CFR 177-2600, ISO 13485, ISO 9001
Packaging	50 gloves per dispenser 10 dispensers per case 500 gloves per case
Storage	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country of Origin	Malaysia
User Needs Segment	High Risk
Available sizes	S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10), XXL (10.5 - 11)
Anti-static	Yes
Vulcanization Chemical Accelerators	- Zinc Dibutyldithiocarbamate (ZDBC) - Zinc Diethyldithiocarbamate (ZDEC) Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.

PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	355 / 14		ASTM D3767, EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151, EN 455-1
Palm Thickness (mm/mils)	0.17 / 6.7		ASTM D3767, EN 420
Finger Thickness (mm/mils)	0.20 / 7.9		ASTM D3767, EN 420
	BEFORE AGING	AFTER AGING	
Ultimate Tensile Strength (MPa)	≥ 14	≥ 14	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412
Force at break (N)	≥ 6	≥ 6	EN 455-2

ORDERING INFORMATION

Size	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)	XXL (10.5 - 11)
Ansell Product Code	93263070	93263080	93263090	93263100	93263110

For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01

Asia Pacific Region

Ansell Global Trading Center
(Malaysia) Sdn Bhd
T: +603 8310 6688
F: +603 8310 6699

North America Region

Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445

Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133


Australia

Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578

Russia

Ansell PYC
Ten. +7 495 258 13 16

Performance Standards and Regulatory Compliance

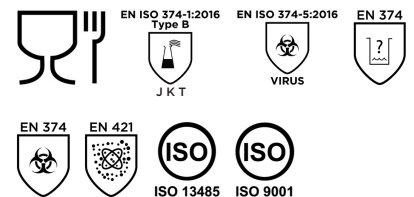

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking © 2020 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.